
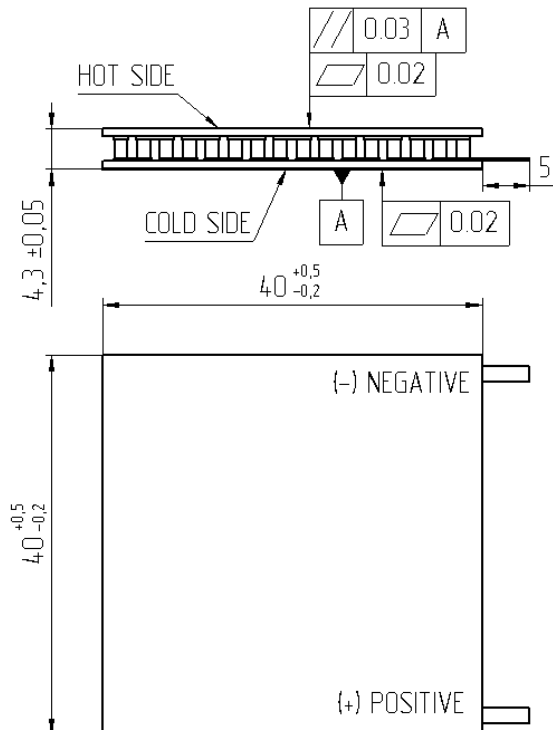


SPECIFICATION OF GENERATING THERMOELECTRIC MODULES TGM-127-1.4-2.0

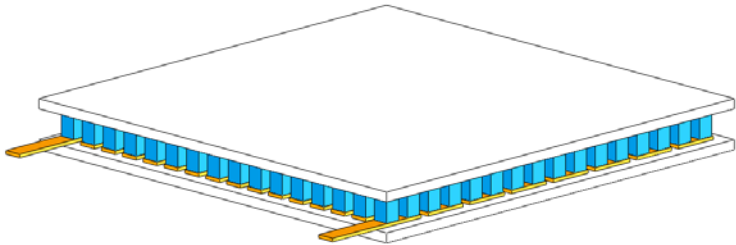

Thermoelectric parameters	Unit	Value
Output power, P* (at $T_h=200^{\circ}\text{C}$, $T_c=30^{\circ}\text{C}$)	W	5,3
I_{load}*	A	1,5
U_{load}*	V	3,5
R_{ac} (at 200°C), ±10 %	Ohm	2,4
Rt	K/W	2,10

* for $R_{load}=R_{ac}$



R_{ac} – internal TGM resistance at working temperature;

R_{load} – load resistance;

Rt – heat resistance.






Operation parameters	Unit	Value
Working temperature	°C	200
Max. processing temperature	°C	220

Additional options	Notations
Height tolerance up to, mm	± 0,015
Flatness up to, mm;	0,01
Parallelism up to, mm;	0,01
Sealants: epoxy, urethane	E, U
Type and length of lead wires	Up to customer's requirements
Assembling into arrays	Up to customer's requirements

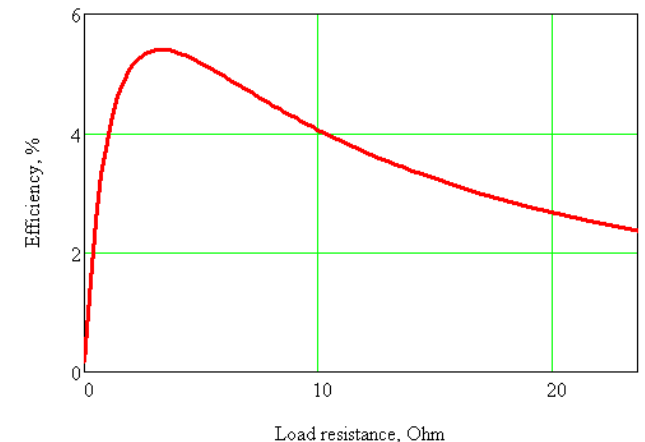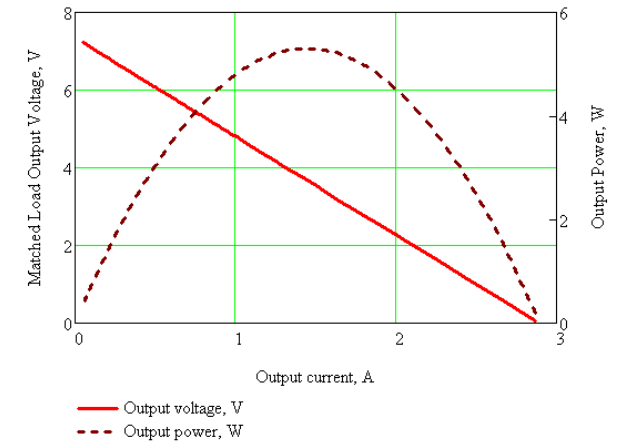

Please refer to our standard assembling recommendations at our [site](#)

SPECIFICATION OF GENERATING THERMOELECTRIC MODULES TGM-127-1.4-2.0

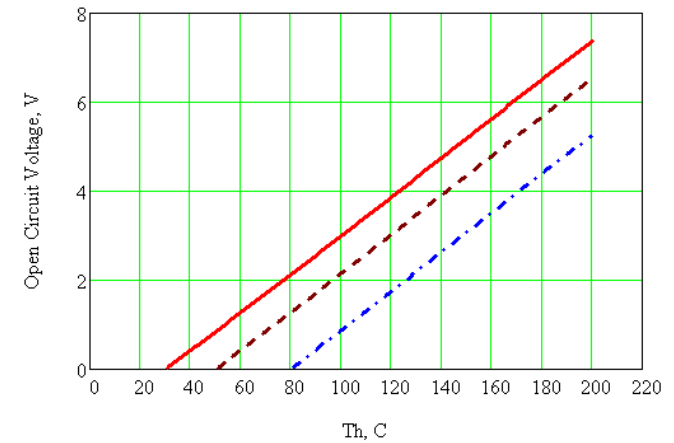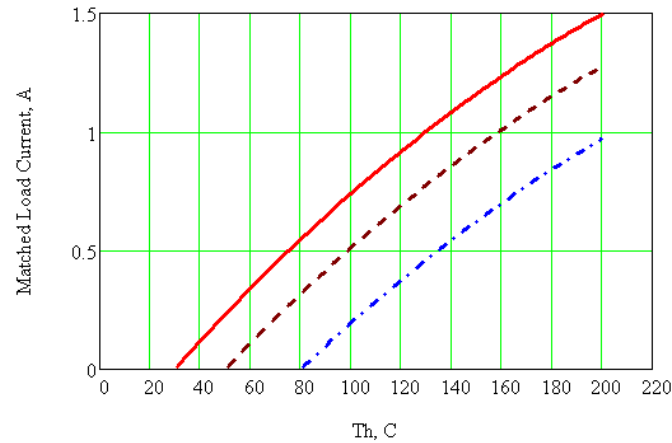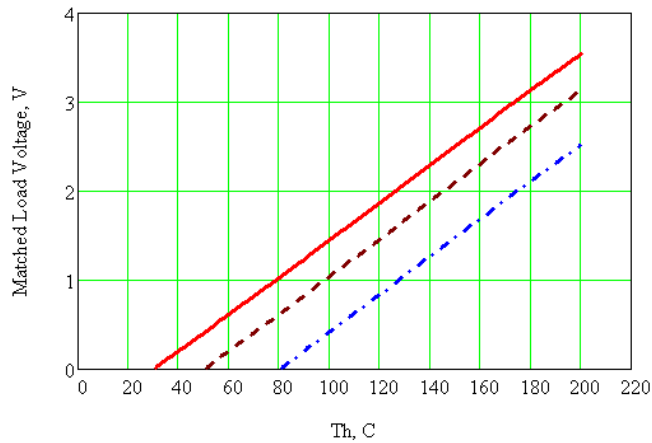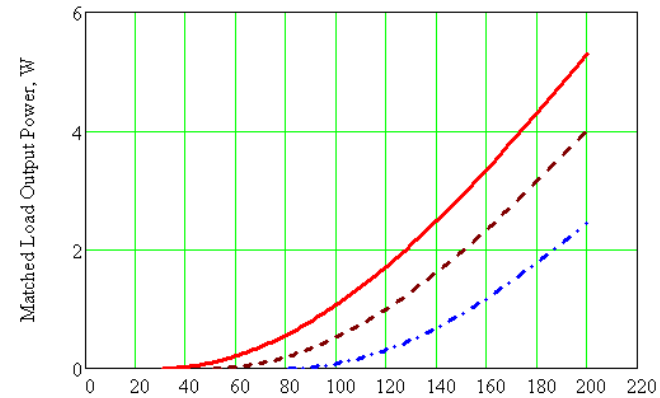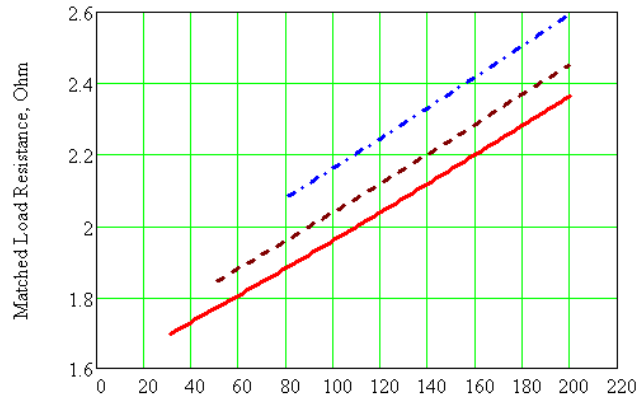

- Tc=30°C
- - - Tc=50°C
- · - · Tc=80°C