
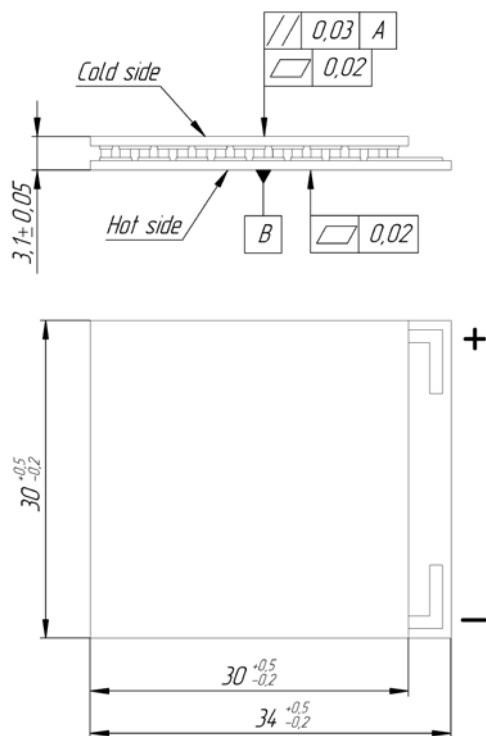


SPECIFICATION OF THERMOELECTRIC MODULE TB-127-1.0-0.8

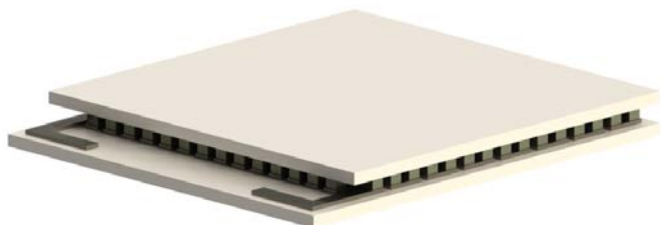

Thermoelectric parameters	Unit	Value
I_{max}	A	5.8
U_{max}	V	15.7
ΔT_{max} ≥	K	69
Q_{max} ≥	W	56
R_{ac} (at 295 K)	Ohm	2.05
Tolerance R_{ac}	%	±10
<i>All parameters except R_{ac} are given at Th=300 K</i>		

Assembly parameters	Unit	Value
Wires	-	-
Cross section	mm²	-
Metallization	-	-
Sealing	-	-
Internal solder	°C	139

Operational parameters	Unit	Value
Working temperature range	°C	-50 ÷ +80
Max. processing temperature	°C	130
ROHS compliance		Yes

