
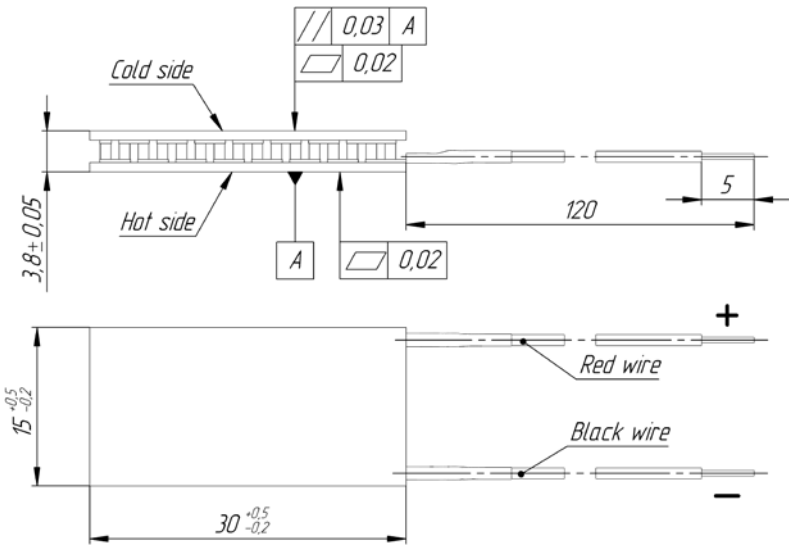


SPECIFICATION OF THERMOELECTRIC MODULE TB-63-1.0-1.5

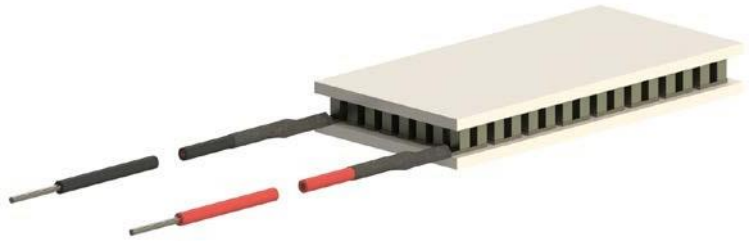

Thermoelectric parameters	Unit	Value
I_{max}	A	3.1
U_{max}	V	7.8
ΔT_{max} ≥	K	69
Q_{max} ≥	W	14.8
R_{ac} (at 295 K)	Ohm	1.8
Tolerance R_{ac}	%	±10

All parameters except R_{ac} are given at Th=300 K

Assembly parameters	Unit	Value
Wires		HB-0.2 4 600
Cross section	mm²	0.2
Metallization		-
Sealing		-
Internal solder	°C	139

Operational parameters	Unit	Value
Working temperature range	°C	-50 ÷ +80
Max. processing temperature	°C	130
ROHS compliance		Yes

